

Just Right



Highly compact IPC empowering your applications


Various interfaces for transparent production processes



Pro-face mobility solutions for remote access



Compact size and low power consumption

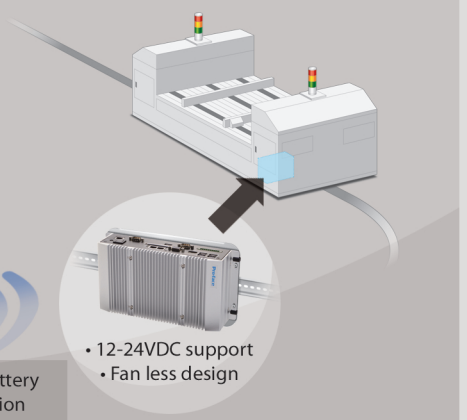

pro-face.com/product/ipc/pe4000b/

Specification		Atom™ N2600 Model	Atom™ N270 Model
CPU		Intel®Atom™ Dual Core N2600 1.6 GHz	Intel®Atom™ Dual Core N270 1.6 GHz
Main Memory		2 GB or 4 GB (DDR3 800 MHz)	2 GB (DDR2 533 MHz)
FAN		FAN less	
Rated Input Voltage		12 to 24 Vdc ±5 %	9 to 36 Vdc ±5 %
Power Consumption		Typically 16 W	Typically 15 W
Supported OS		Windows®Embedded Standard 2009 (32bit) or Windows®Embedded Standard 7 (32bit)	
Surrounding Air Temperature		0 to 60°C [32 to 140 °F] (with airflow, speed = 0.7 m/sec.) 0 to 50°C [32 to 122 °F] (without airflow)	0 to 70°C [32 to 150 °F] (with air flow, speed = 0.7 m/sec.) 0 to 60°C [32 to 140 °F] (without airflow)
Interface	Ethernet	10/100/1000 Mbit/s x 3	10/100/1000 Mbit/s x 1
	USB	USB 2.0 x 5	USB 2.0 x 2
	Serial	RS-232C x 2, RS-232C/422/485 x 4	RS-232C x 2
	Video	Analog RGB x 1, HDMI x 1	Analog RGB x 1
	Expansion Slot	Mini PCIe (full size) x 1	Mini PCIe (half size) x 1
	Digital I/O	8 points (selectable I/O)	-
	Others	Line out, Mic-in, Line in	PS2 x 1
Storage		SSD x 1	
		CFast x 1	CF x 1
External Dimensions		264.5 x 68.4 x 133 mm (10.41 x 2.69 x 5.24 in.)	254.8 x 58.7 x 149.2 mm (10.03 x 2.31 x 5.88 in.)

Lineup		
Storage / OS	Atom™ N2600 Model	Atom™ N270 Model
SSD (80GB) / WES7	PFXPEBBD42DNN1	-
CFast (16GB) / WES7	PFXPEBBD42CNN1	-
CFast (8GB) / WES2009	PFXPEBBD21BNN1	-
CF (8GB) / WES2009	-	PFXPEBAD21ANN1
None	PFXPEBBD40NNN1	PFXPEBAD20NNN1

Options			Software	
	Model	Product Description	Model	Product Description
Storage	PFXZPESSD81	SSD unit 80GB for PE-4000B	(Web Download)	Pro-face Remote HMI
	PFXZPESSD161	SSD unit 160GB for PE-4000B		Software to operate Pro-face HMI screen on any iOS or Android device
	PFXZPECF81	CF Card 8GB for PE-4000B	PFXEXRHSLs	Pro-face Remote HMI Server
	PFXZPECF8A2	CFast Card 8GB for PE-4000B		The Pro-face Remote HMI Server is a Windows S/W to connect any IPC or PC with our Pro-face Remote HMI APP and operate any kind of S/W via the APP
	PFXZPECF162	CFast Card 16GB for PE-4000B		
Adaptor	PFXZPEAFDR1	DIN rail Adaptor for N270	PFXEXSDVV**	Pro-Server EX Ver.★★*3
	PFXZPEAFDR2	DIN rail Adaptor for N2600		Software that connects a PC to most Pro-face HMIs via Ethernet for data collection and transmission
	PFXZPECNHDDV1	HDMI-DVI connector*1		
EZ Series*2	PFXZCCEUSG1	EZ Illuminated Switch	PFXEXEDV**	GP-Pro EX Ver.★★
	PFXZCCEUKB1	EZ Numpad		Screen-creation software
	PFXZCCEUSS1	EZ Fingerprint Recognition Unit		Win GP for IPC
Maintenance	PFXZPECNDC1	DC power supply connector for N270	EX-WINGP-IPC	Runtime license on Pro-face's IPC, for using the screen data created with the screen
	PFXZPECNDC2	DC power supply connector for N2600		
	PFXZPECNDIO1	DIO Connector		PFE-RAOI-START-PACKAGE Remote Touch over Inthernet

*1 : Separately prepare a clamp to prevent the connector from being disconnected before use.

*2 : UBS options can only be used together with the Win GP software.

*3 : The Pro-Server EX can only be used in Client mode in conjunction with Win GP.

⚠ WARNING

HAZARD OF OPERATOR INJURY, OR UNINTENDED EQUIPMENT DAMAGE

Before operating any of these products, be sure to read all related manuals thoroughly.

Failure to follow these instructions can result in death or serious injury, unintended equipment damage.

- For printing purposes, the colors in this catalog may differ from those of the actual unit.
- All product names used in this catalog are the registered trademarks or trademarks of their respective companies.
- Actual user screens may differ from the screens shown here.
- All information contained in this catalog is subject to change without notice.
- Electric equipment should be installed, operated, serviced, and maintained only by qualified personnel. No responsibility is assumed by Digital for any consequences arising out of the use of this material.



for the best interface

Global Headquarters
Digital Electronics Corporation
[JAPAN] Tel: +81 (0)6-6613-1101

[AUSTRALIA] Tel: +61 (0)3 9550 7396
[AUSTRIA] Tel: +43 7236 3343 620
[CHINA] Tel: +86-(0)21-6361-5175
[DENMARK] Tel: +45 70 22 01 22
[ENGLAND] Tel: +44 (0)2476 511288
[FRANCE] Tel: +33 (0)1 60 21 22 91
[GERMANY] Tel: +49 (0)212 258 260
[INDIA] Tel: +91 80 4333 3540

North/South American Headquarters
Pro-face America Inc.
[U.S.A.] Tel: +1-734-477-0600

[INDONESIA] Tel: +62 21 750 4496
[ITALY] Tel: +39 0362 59 96 1
[POLAND] Tel: +48 22 465 66 62
[RUSSIA] Tel: +7 (812)336 47 06
[SOUTH KOREA] Tel: +82-(0)2-2630-9850
[SPAIN] Tel: +34 (0)93 846 07 45
[SWEDEN] Tel: +46 46 540 90 70
[SWITZERLAND] Tel: +41 (0)43 343 7272

European Headquarters
Pro-face Europe B.V.
[THE NETHERLANDS] Tel: +31 (0)23 55 44 099

[TAIWAN] Tel: +886-(0)2-2657-1121
[THAILAND] Tel: +66-(0)2-617-5678
[SINGAPORE] Tel: +65-6832-5533

